


SELO MECÂNICO T21

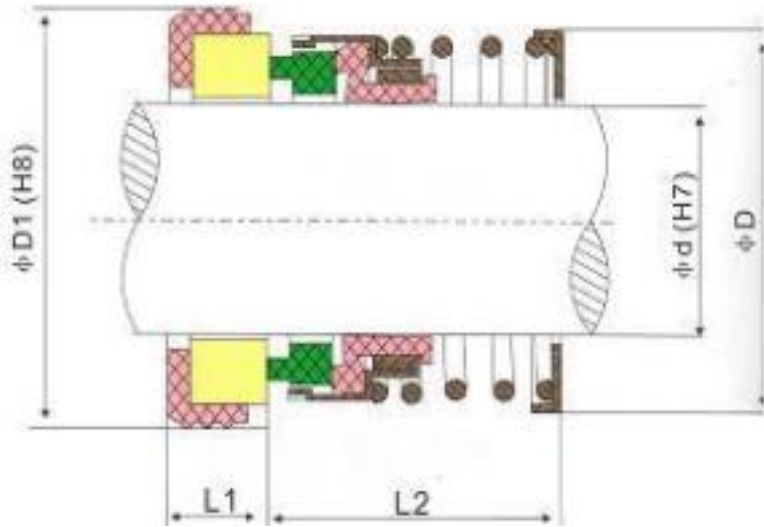

Operating Limits

Pressure: $\leq 0.8\text{MPa}$

Speed: 10m/s

Temperature: $\leq -20^{\circ}\text{C} - 150^{\circ}\text{C}$

Medium: Water, oil, and weakly-corrosive mediums, etc.

	d	D	D1	L1	L2
21-1/2"	12.7	23.88	25.4	7.92	20.82
21-5/8"	15.875	26.7	31.75	10.29	22.43
21-3/4"	19.05	31.09	34.93	10.29	22.43
21-7/8"	22.225	33.4	38.1	10.29	24
21-1"	25.4	43.18	41.28	11.1	25.6
21-1 1/8"	28.575	46.28	44.45	11.1	27.17
21-1 1/4"	31.75	49.4	47.63	11.1	27.17
21-1 3/8"	34.925	52.58	50.8	11.1	28.78
21-1 1/2"	38.1	55.8	53.98	11.1	28.78
21-1 5/8"	41.275	62.2	60.33	12.7	35.13
21-1 3/4"	44.45	66	63.5	12.7	35.13
21-1 7/8"	47.625	66.6	66.68	12.7	38.3
21-2"	50.8	73	69.85	12.7	38.3
21-2 1/8"	53.9	73.3	76.2	14.27	43.05
21-2 1/4"	57.1	78.41	79.38	14.27	43.05
21-2 3/8"	60.3	82	82.55	14.27	46.25
21-2 1/2"	63.5	84.87	85.73	14.27	46.25
21-2 5/8"	66.6	88.4	85.73	15.9	49.4
21-2 3/4"	69.8	92.58	88.9	15.9	49.4
21-2 7/8"	73	94.85	95.25	15.9	52.57
21-3"	76.2	101.9	98.43	15.9	52.57